

TECHNICAL DATA SHEET

LU4TD IP68 / Aga-Led® Type B


VERSION - 01.09.2015

STANDARD LUMINAIRE

Reference	LU4TD68
Protection Class	IP68
Lighting Source	Aga-Led® Type B
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	ø35mm
Length standard	135 - 520 - 1015 - 1510 - 2005 - 2665 - 2940mm
Length on measure	on request up to 2940mm
Nb Lighting Source	34 LED/m
Voltage	24V
Power	40.8 W/m
Connecting Cable	One Side: 1m cable Silicone 180° 2x1.5mm ²
End Caps	RECS



LU4TD68 / AGA-LED® TYPE B - Festoon

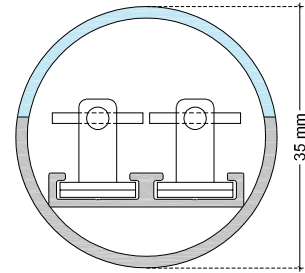

FINISH

Color Finishing Profil

Standard Polycarbonate lens



ON REQUEST

Fixation	FL (Width:+7mm - Ht:+10mm)
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2				
Ref	B2	B3	B4	B6	
Voltage	24V	24V	24V	24V	
Power	1.2W	0.96W	1.2W	1.2W	
Beam Angle	120°	120°	120°	120°	
CRI	80	80	80	80	
Color Temperature	lm/Unit				
	2000K	40 ~ 68	40 ~ 82	46 ~ 78	70 ~ 118
	2400K	48 ~ 81	58 ~ 97	55 ~ 93	83 ~ 140
	2800K	68 ~ 114	82 ~ 137	66 ~ 111	99 ~ 166
	4000K	68 ~ 114	82 ~ 137	66 ~ 111	99 ~ 166
Lifetime / L70 at 25°	50'000h / 36'000h				
Working T°	-20°C to +45°C				
Environmental protection	Modified acrylate resin				

LU4TD68 + FL

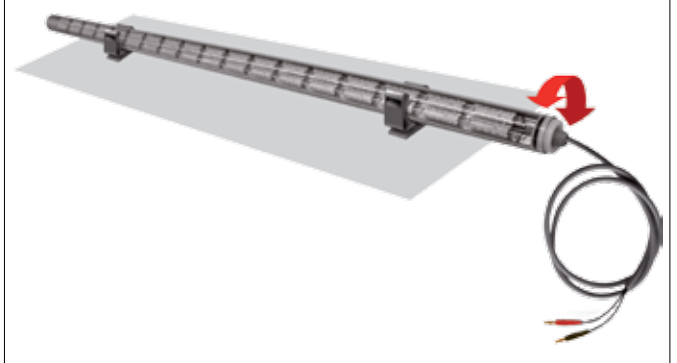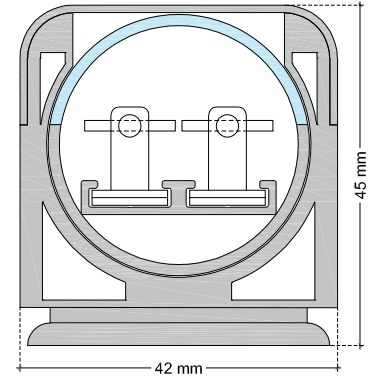

CERTIFICAT



ON REQUEST

Connecting plug AF/AMS



Connecting plug AF-E/AMS-E



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

