


Luminaire		Measurement		Lamp		
Code	LU4AL BB2800K	Code	LU4AL BB2800K	Code		
Name	LU4AL-1000 BB2800K	Name	Rail LU4AL-1000	Number	1	
Line	AGABEKOV	Date	01-00-0098	Position		
Efficiency	48.15%	Coordinate system	C-G	Total Flux	306.00 lm	
Maximum value	176.20 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	1000 mm	Width	25 mm	Height	20 mm
Rectangular Luminous Area	Length	1000 mm	Width	25 mm	Height	0
Horizontal Luminous Area	0.025000 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.006048 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	180			
Measurement Distance	0.00	Measurement Flux	306.00 lm			
Operator		Source Voltage	0.00 V			
Temperature	0.00 °C	Source Current	0.00 A			
Humidity	0.00 %	Photocell				
Notes	1 * "17 AGA-LED BB 2800K" = 306.0 lm					
C.I.E.	5/5/5/5/5/5/5/5/5/6/6	D DIN 5040	A41			
F UTE	0.46 E + 0.02 T	B NBN	BZ 4/3 / BZ 5			

1000mm x 25mm

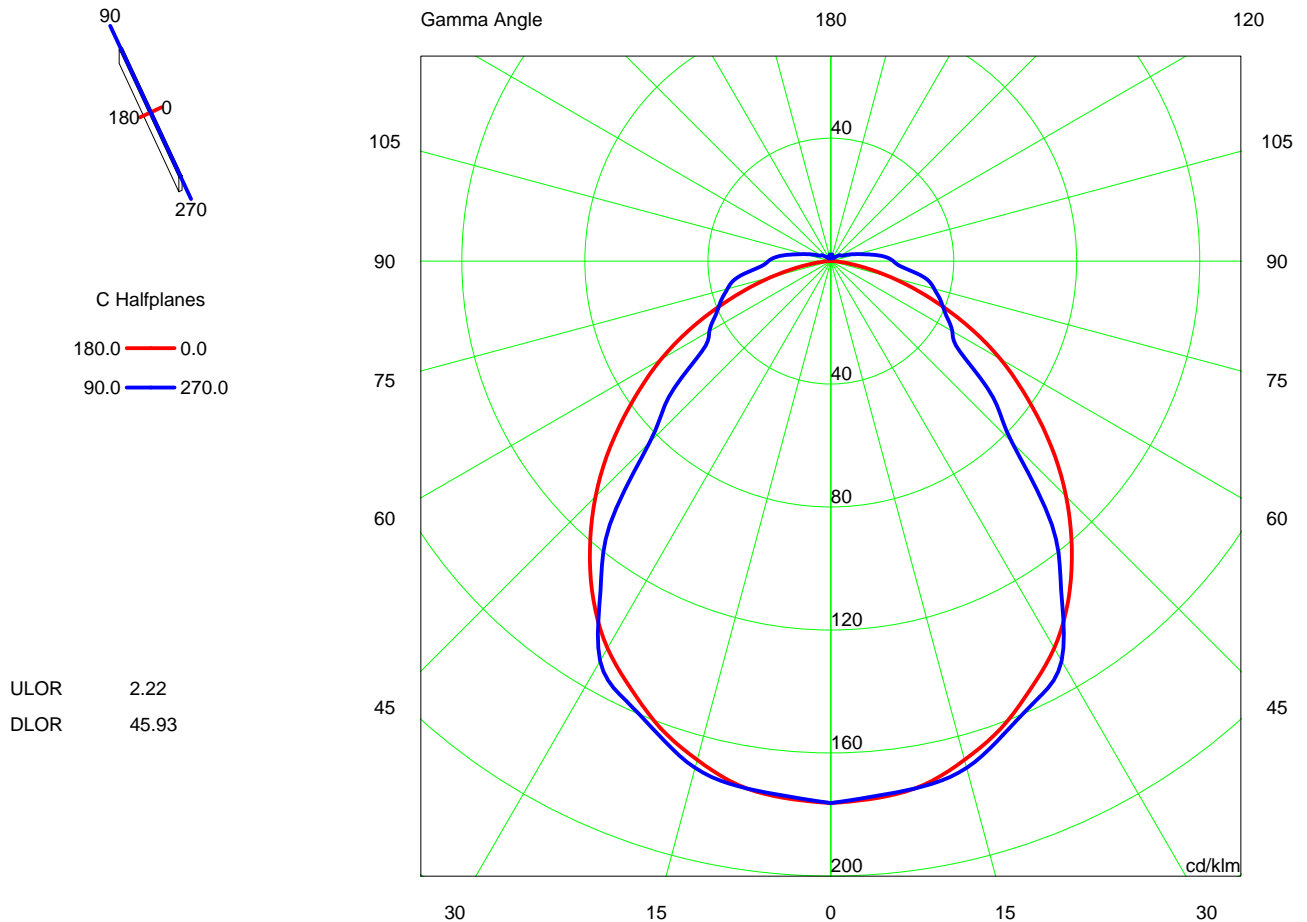

Luminaire		Measurement		Lamp
Code	LU4AL BB2800K	Code	LU4AL BB2800K	Code
Name	LU4AL-1000 BB2800K	Name	Rail LU4AL-1000	Number
Line	AGABEKOV	Date	01-00-0098	Position
				1

Efficiency	48.15%	Coordinate system	C-G	Total Flux	306.00 lm
------------	--------	-------------------	-----	------------	-----------

		Luminous Intensity Table cd/klm						
		Table 1/1						
		C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	176.20	176.20	176.20	176.20	176.20	176.20	176.20	176.20
G 5.0	175.20	175.30	175.30	174.40	174.60	175.10	174.50	
G 10.0	173.00	172.80	172.90	172.40	173.50	173.60	173.40	
G 15.0	167.90	167.60	168.60	170.10	171.10	171.10	170.60	
G 20.0	161.70	161.70	163.60	164.70	165.30	165.30	163.90	
G 25.0	153.60	154.70	157.90	156.90	156.00	158.10	157.70	
G 30.0	145.30	146.50	148.20	148.30	149.90	153.30	150.10	
G 35.0	134.60	137.90	137.80	142.00	136.60	133.60	130.60	
G 40.0	121.90	125.30	125.70	132.00	122.00	115.90	111.80	
G 45.0	108.20	112.60	114.90	117.30	102.10	86.80	83.30	
G 50.0	93.50	97.10	101.30	96.20	75.90	71.80	68.80	
G 55.0	78.20	81.20	86.20	86.40	60.10	52.20	51.20	
G 60.0	63.70	66.60	65.70	52.90	46.50	46.10	45.60	
G 65.0	48.30	53.70	45.00	39.20	40.10	41.30	41.30	
G 70.0	33.20	40.00	31.30	33.00	37.10	38.30	38.10	
G 75.0	20.30	23.10	23.30	29.40	33.40	34.80	34.80	
G 80.0	9.60	13.50	18.80	25.00	29.40	31.00	31.00	
G 85.0	3.20	8.10	12.10	17.80	21.90	23.40	23.50	
G 90.0	0.70	3.60	7.80	13.40	18.30	20.10	20.30	
G 95.0	0.70	1.30	4.90	10.60	15.30	17.10	17.30	
G100.0	0.30	0.80	2.70	6.30	9.80	11.90	12.50	
G105.0	0.30	0.60	2.00	4.30	6.60	8.40	8.80	
G110.0	0.30	0.60	1.80	2.80	4.40	5.90	6.30	
G115.0	0.20	0.50	1.40	2.50	3.40	4.20	4.30	
G120.0	0.10	0.60	1.10	2.30	3.30	3.60	3.70	
G125.0	0.10	0.60	0.90	1.60	2.50	3.20	3.30	
G130.0	0.20	0.70	1.00	1.10	1.60	2.30	2.30	
G135.0	0.20	1.00	1.00	1.10	1.30	1.60	1.60	
G140.0	0.20	1.10	0.90	1.40	1.10	1.10	1.20	
G145.0	0.40	1.50	1.10	1.60	1.40	1.30	1.10	
G150.0	0.40	1.70	1.10	1.20	1.70	1.60	1.30	
G155.0	0.60	1.70	1.30	1.20	1.30	1.60	1.70	
G160.0	0.70	2.00	1.70	1.30	1.30	1.40	1.40	
G165.0	0.90	2.10	2.20	1.80	1.50	1.40	1.50	
G170.0	0.90	1.70	2.30	2.20	2.00	1.80	2.10	
G175.0	0.90	0.90	1.60	2.20	2.30	2.00	2.00	
G180.0	0.90	0.90	0.90	0.90	0.90	0.90	0.90	