

## TECHNICAL DATA SHEET

### LU4TSAL IP68 / Aga-Led® Type A


VERSION - 02.06.2016

#### STANDARD LUMINAIRE

Reference	LU4TSAL68
Protection Class	IP68 - 1meter
Lighting Source	Aga-Led® Type A
Connector	Festoon on B'Light conductor 16mm <sup>2</sup>
Dimensions	ø35mm
Lenght standard	135 - 520 - 1015 - 1510 - 2005 - 2665 - 2995mm
Lenght on measure	on request up to 2995mm
Nb Lighting Source	17 LED/m
Voltage	24V
Power	17 W/m
Connecting Cable	One Side: 1m cable Silicone 180° 2x1.5mm <sup>2</sup>
End Caps	RECS



#### LU4TSAL68 / AGA-LED® TYPE A - Festoon

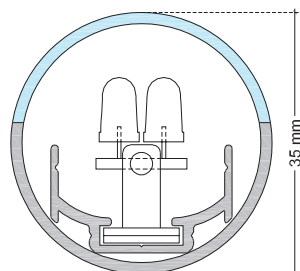

#### FINISH

##### Color Finishing Profil

Standard	Polycarbonate <i>Not suitable for swimming-pool or chlorine environment</i>
----------	--------------------------------------------------------------------------------

#### ON REQUEST



Fixation	FL (Width:+7mm - Ht:+10mm)
Connecting Cable	Two sides: in and out cables
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type A
Ref	A10
Voltage	24V
Power	1W
Beam Angle	15°
CRI	80
Lifetime	60'000h
Working T°	-30°C ~ +55°C
Option	AGC: Anti Glare Optic



#### ON REQUEST: LU4T68 Fixation

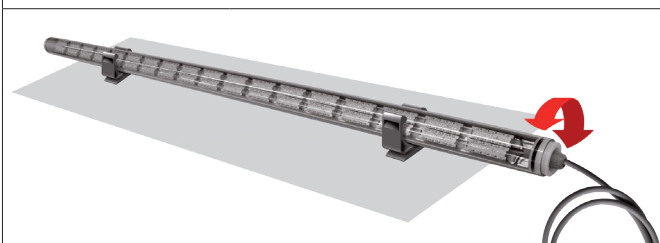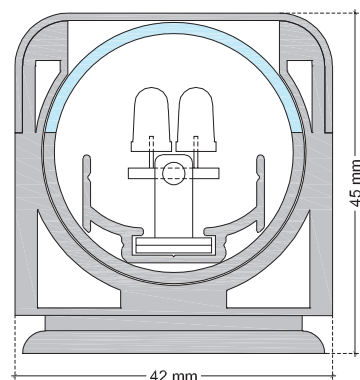

#### Color Temperature & Luminous Flux / Unit

CCT	<b>2800K</b>	<b>4000K</b>
Luminous Flux/Unit	40 lm	45 lm

#### CERTIFICAT



#### ON REQUEST: Connecting Plug

##### Connecting plug AF/AMS



##### Connecting plug AF-E/AMS-E

