

TECHNICAL DATA SHEET

LU4TX66 / TUBE SILICONE IP65 / Xenon

VERSION - 13.03.2017


STANDARD LUMINAIRE

Reference	LU4TX66
Protection Class	Tube Silicone IP65
Lighting Source	Xenon - 3W/5W max.
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions	53x55mm
Standard Length	525mm - 1020mm - 1515mm - 2010mm
Length on measure	With 3W: 140mm to 3000mm With 5W: 140mm to 2010mm
Nb Lighting Unit	16 bulbs/m
Voltage	24V
Power	With 3W: 48W/m With 5W: 80W/m
Connecting Cable	One Side: 1m Cable Silicone 180° - 2x2.5mm ² On request: Cable length on measure

APPLICATION: SAUNA



LU4TX66 + Tube Silicone / Xenon 3W/5W max.

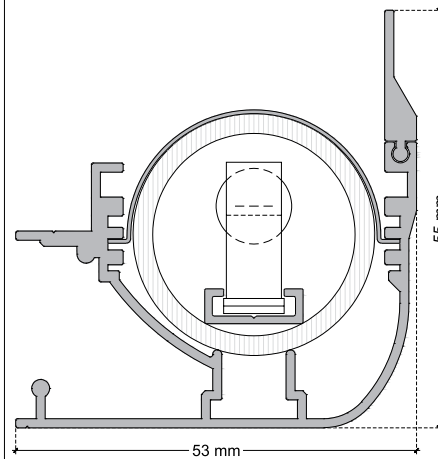

FINISH

Color Finishing Profil

Profil	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising
Tube Silicone	Transparent Elastomer Silicone - High dielectric rigidity - Good resistance to chemical product - Excellent resistance to ozone and aging - Temperature resistance: -60°C ~ +200°C

ON REQUEST

Fixation	Special Sauna
Connecting Cable	Two Sides: 1m Cable Silicone 180° - 2x2.5mm ² On request: Cable length on measure
Dimming Option	1-10V, Dali, KNX Ask technical departement for more information

LIGHTING SOURCE

Lighting Source	Xenon Long Life
Glass	Clear or Frosted
Power	3W or 5W
Voltage	24V
Beam Angle	360°
Lifetime	20'000h


Color Temperature & Luminous Flux / Unit

Power	3W	5W
CCT	2300K	2400K
Luminous Flux/Unit	12.6 lm	40 lm

CERTIFICAT



ON REQUEST: Fixation Special Sauna

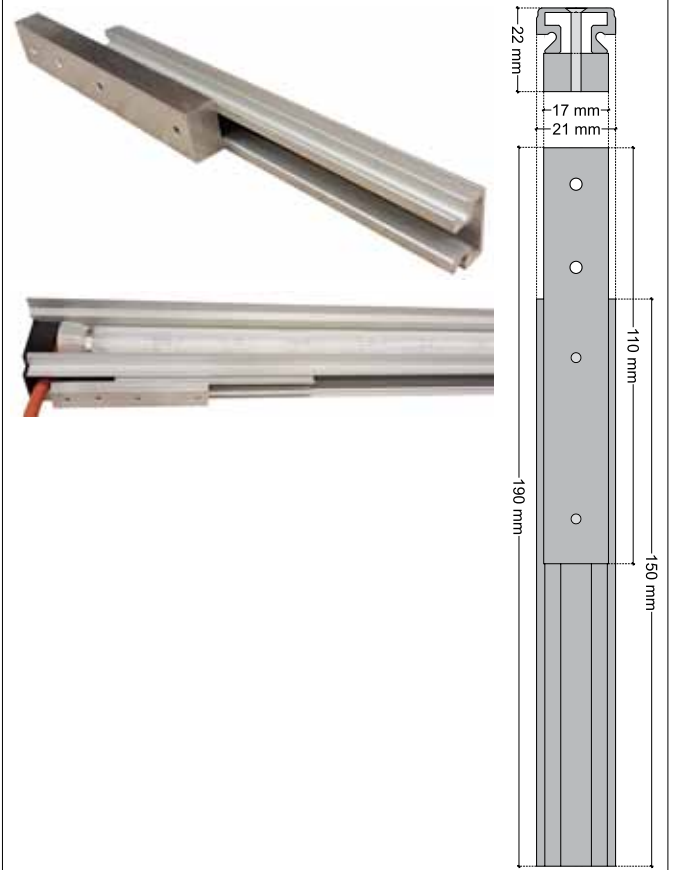

AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

